

easyblackout blackout blind kit

easyblinds
blackout blinds

Thank you for purchasing easyblinds!

Please read and keep these instructions for further use.

Your new easyblackout kit includes:

- 1 sheet of easyblackout fabric
- 1 roll of VELCRO® Brand hook fastener tape for use on uPVC window frames
- 1 set of Frame Fastener stickers for use on painted wooden window frames. These can also be used on upvc frames for more temporary use as they are easier to remove than fastener tape



*works on any
shape window*

*simply cut to fit,
it won't fray*


*for more information,
please visit our website*



sales@easyblindsonline.co.uk www.easyblindsonline.co.uk

Patent GB2465344, US Design Patent Pending, Community Registered Design No. GB 002457481

INSTRUCTIONS

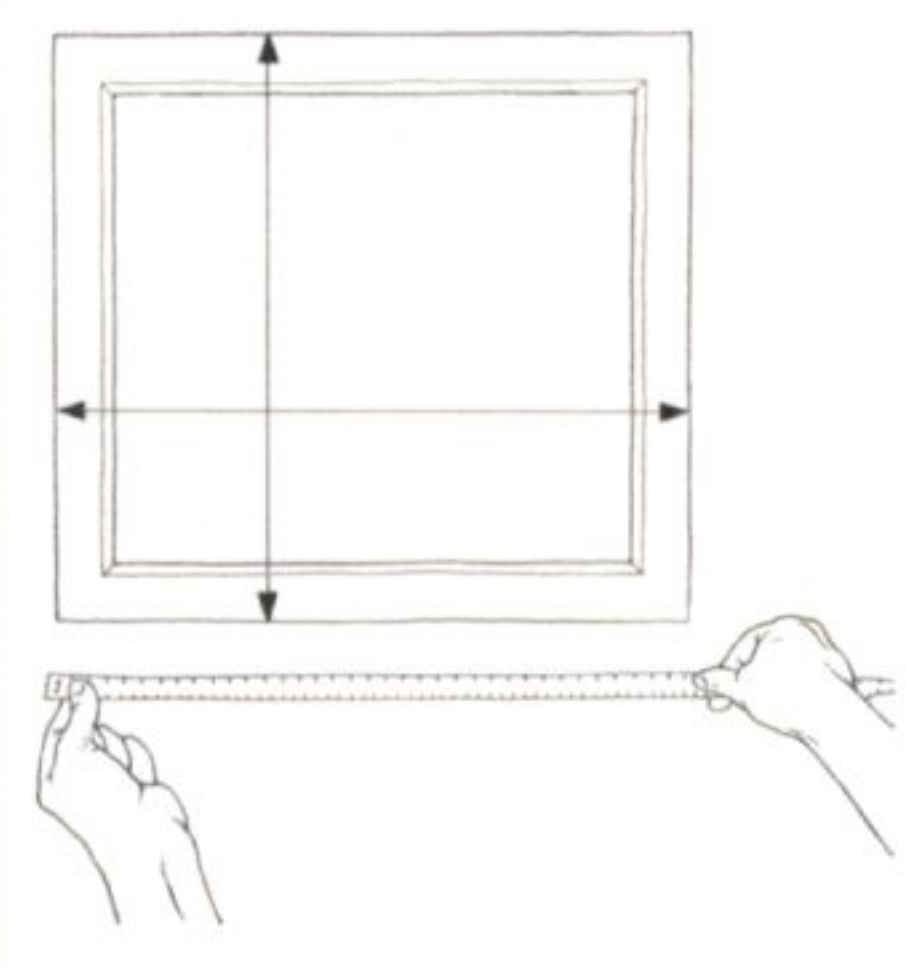


STEP 1

Measure your window, and using sharp scissors, cut your easyblackout fabric to the shape and size required, ensuring that the fabric is larger than the window recess. There should be an excess of at least 2cm (3/4 inch) on each of the four sides so that the fabric 'folds around' and sits against the window surround. This helps to achieve the best degree of blackout.

STEP 2

Make sure the window frame is completely clean and dry (some cleaning products can leave a residue, so rinsing with water after cleaning can help). Apply your choice of attachment to the window frame (for info. please see front of sheet).

Tape or Frame Fasteners

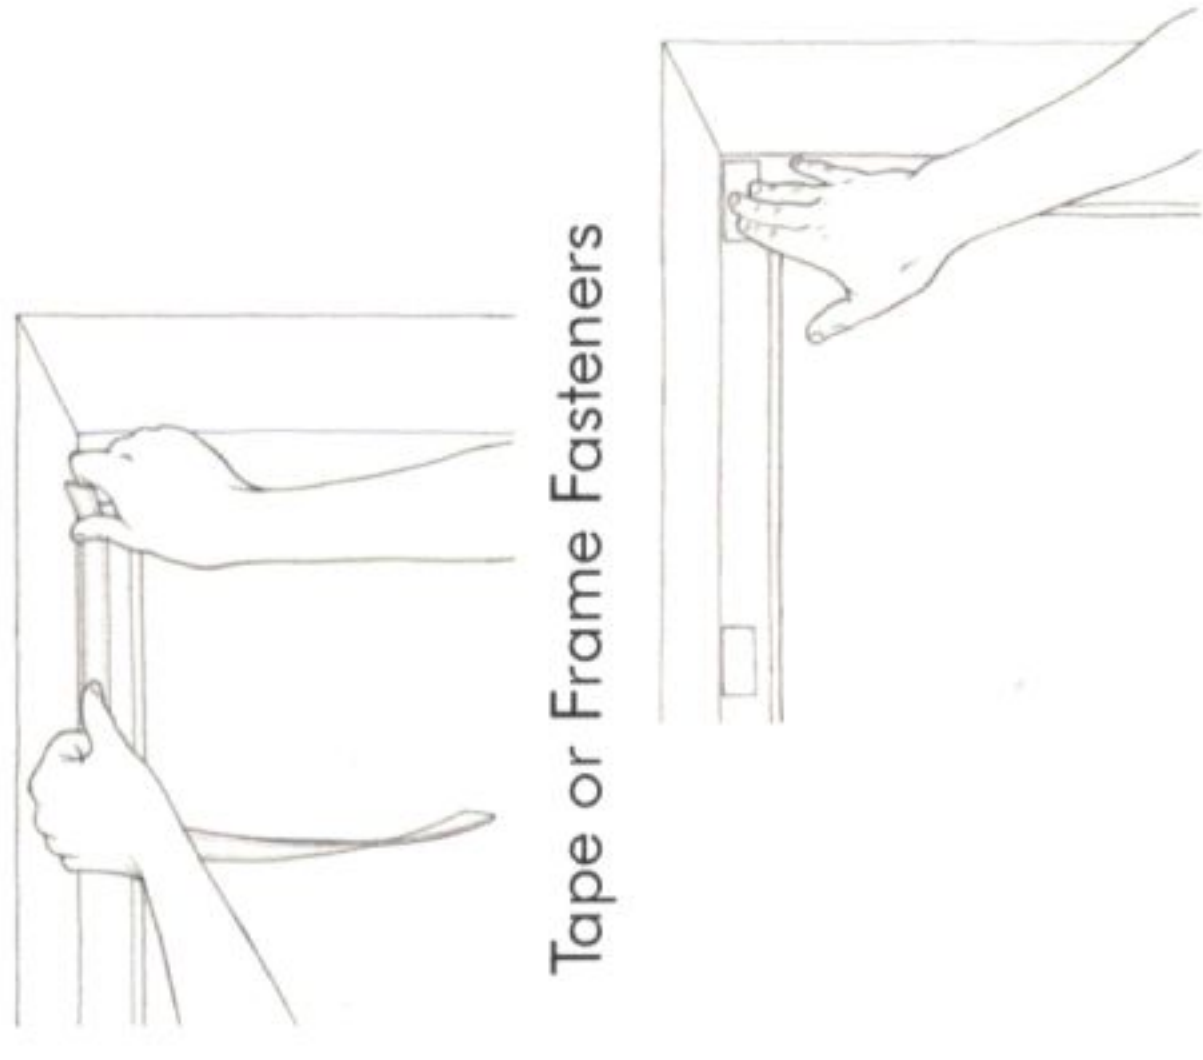


- Apply self-adhesive Velcro® brand hook fastener tape all of the way around the window frame at the outside edges (ie away from the glass), OR
- Apply Frame Fastener stickers to each of the four corners with more at approximately 30cm intervals along the top and sides as required.

Press firmly and wait 24 hours before hanging your blackout blind to allow the adhesive to bond fully.

STEP 3

When required, press the easyblackout material against your choice of attachment on the window frame. Avoid wrinkles in the fabric as these can allow light to enter. To remove your blackout, grip the fabric firmly and peel it gently away from the attachments on the frame.

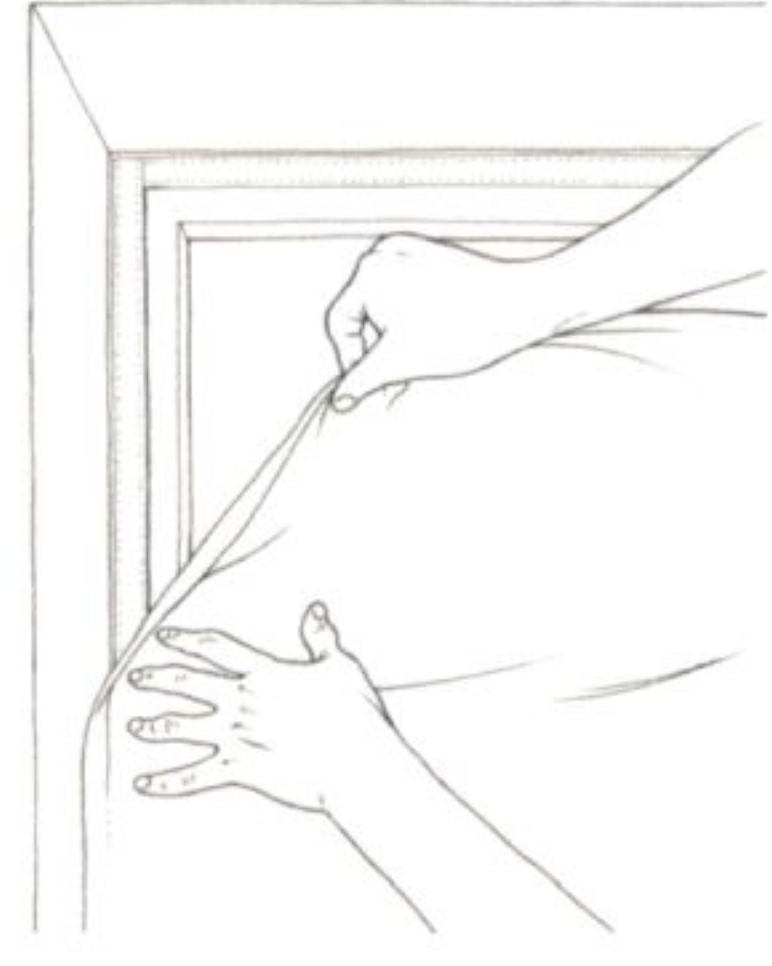

SAFETY NOTE: As this product is used to cover the window, it is essential to ensure that there is always sufficient ventilation in a baby or child's bedroom. If used with small children, do not place directly over a bed, or where it may be pulled down by a child.

PLEASE NOTE

- It is important to open your blackout between uses. If the fabric becomes damp from condensation or moisture on the window, it should be aired and dried between uses.
- Easyblackout fabric can be wiped with a damp cloth, or if necessary washed on a low temperature gentle/handwash cycle.
- When no longer required, the fastener tape can be peeled away from the window frame. Any residue left by the adhesive can be removed with bathroom silicone-sealant remover, available from hardware or DIY shops, or acetone-based nail polish remover.

VELCRO® is a registered trademark of Velcro Industries B.V.