

Advance F 70-4 C DR U

Freezer





ACCESSORIES INCLUDED

3 grey shelves (530 x 650mm) + 1 bottom shelf

OPTIONAL ACCESSORIES

Set of legs 130-180 mm
Set of castors 125 mm (2 x breaked and 2 x unbreaked)
Grey shelf with back guard
Grey bottom shelf with back guard
Stainless shelf with back guard
Stainless bottom shelf with back guard
Set of stainless shelves (3 top and 1 bottom) with back guard
Master key
Pedal door openers with overload protection

 Energy Consumption (kWh/Year)
 Energy Efficiency Class
 Energy Efficiency Class Standard
 Energy Efficiency Index EEI

 2,389
 D
 ISO 22041-2019
 67.46

PRODUCT SERIES: ADVANCE ITEM NUMBER: 133702030 COUNTRY OF ORIGIN: TURKEY

Hoshizaki Advance F 70 C DR U is a 2/1 GN deep freezer with a net usable volume of 420 ltr. ranking in energy efficiency class D. It has a cabinet height of 1975mm and depth of 830mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Compartmentalized design for maximum internal capacity and easy maintenance
- Heavy duty cabinet
- \bullet Climate class 5 cooling system enduring up to +40°C ambient temperature
- Clean free condenser (condenser filter not needed)
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf-supports moulded into the inner lining
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pan-shaped inside base with rounded corners to catch fluids
- IP2X water protection
- Matching design identity as the Advance counters

WARRANTY PERIOD 5 Years on Parts & Labour

EXTERIOR Stainless

INTERIOR
Stainless

Refrigerant: R290 / Refrigerant (kg): 0.082 / CO2 equivalent (kg): 0.246



Advance F 70-4 C DR U


TECHNICAL SPECIFICATIONS


Temperature Range	GN or Tray Size (mm)	Volume, Gross (Itr.)	Net Usable Volume (ltr.)	Power Supply	Connection Load (Watt)	Ref. Capacity at -25°C (Watt)	Climate Class	Sound Level – dB(A)
-25/-12°C	2/1 GN deep	600	420	230V, 50 Hz	650	506	5 (max. ambient 40°C w/ 40% RH)	54


SHIPPING SPECIFICATIONS


Dimensions W x D x H (mm)	Net Weight (kg)	Weight, Packed (kg)
654 x 830 x 1975 (including castors)	123	133

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

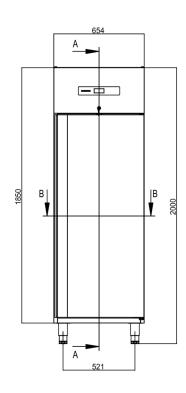

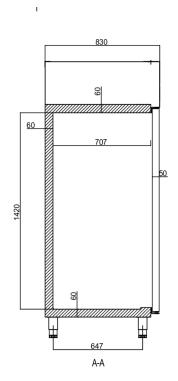







Hoshizaki Belgium Hoshizaki Danmark Hoshizaki Deutschland Hoshizaki France Hoshizaki Iberia Hoshizaki Italia Hoshizaki Middle East info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands Hoshizaki Norge Hoshizaki Sverige Hoshizaki UK Export countries Other countries info@hoshizaki.nl salg@hoshizaki.no orderSE@hoshizaki.dk uksales@hoshizaki.uk sales.ex@hoshizaki-europe.com sales.ex@hoshizaki-europe.com