

Advance K 70-4 C DR U Refrigerator



PRODUCT SERIES: ADVANCE
ITEM NUMBER: 131702030
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Advance K 70 C DR U is a 2/1 GN deep refrigerator with a net usable volume of 415 ltr. ranking in energy efficiency class C. It has a cabinet height of 1975mm and depth of 830mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Compartmentalized design for maximum internal capacity and easy maintenance
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Clean free condenser (condenser filter not needed)
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf-supports moulded into the inner lining
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pan-shaped inside base with rounded corners to catch fluids
- IP2X water protection
- Matching design identity as the Advance counters



2/1 GN

ACCESSORIES INCLUDED

3 grey shelves (530 x 650mm) + 1 bottom shelf

OPTIONAL ACCESSORIES

Set of legs 130-180mm
Set of castors 125mm (2 x broken and 2 x unbroken)
Grey shelf with back guard
Grey bottom shelf with back guard
Stainless shelf with back guard
Stainless bottom shelf with back guard
Set of stainless shelves (3 top and 1 bottom) with back guard
Master key
Pedal door openers with overload protection

WARRANTY PERIOD

5 Years on Parts & Labour

EXTERIOR

Stainless

INTERIOR

Stainless

Refrigerant: R290 / Refrigerant (kg): 0.058 / CO2 equivalent (kg): 0.17

CERTIFICATIONS



Energy Consumption (kWh/Year)	Energy Efficiency Class	Energy Efficiency Class Standard	Energy Efficiency Index EEI
548	C	ISO 22041-2019	42.41



HOSHIZAKI

Advance K 70-4 C DR U




TECHNICAL SPECIFICATIONS

Temperature Range	GN or Tray Size (mm)	Volume, Gross (ltr.)	Net Usable Volume (ltr.)	Power Supply	Connection Load (Watt)	Ref. capacity at -10°C (Watt)	Climate Class	Sound Level – dB(A)
0/+10°C	2/1 GN deep	600	415	230V, 50 Hz	140	361	S (max. ambient 40°C w/ 40% RH)	50

SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Net Weight (kg)	Weight, Packed (kg)
654 x 830 x 1975 (including castors)	112	122

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

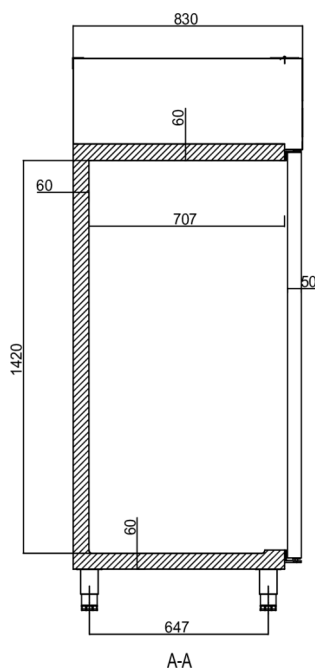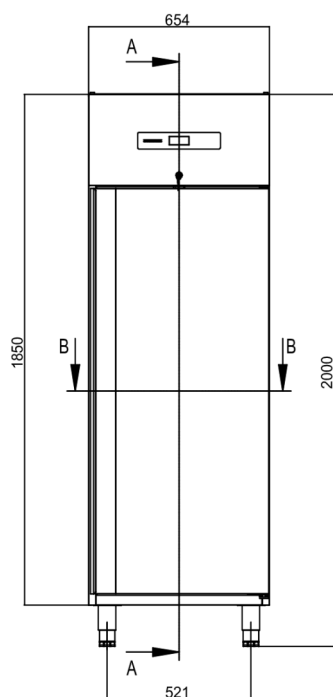

B-B

LEG	CASTER



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.uk