

Advance K 140-4 C U

Double door refrigerator



2 / 1 GN

ACCESSORIES INCLUDED

6 grey shelves (530 x 650mm) + 2 bottom shelves

OPTIONAL ACCESSORIES

Set of legs 130-180 mm
 Set of castors 125 mm (2 x broken and 2 x unbroken)
 Grey shelf with back guard
 Grey bottom shelf with back guard
 Stainless shelf with back guard
 Stainless bottom shelf with back guard
 Set of stainless shelves (6 top and 2 bottom) with back guard
 Shelf support U-shape, left side
 Shelf support U-shape, right side
 Master key
 Pedal door openers with overload protection

PRODUCT SERIES: ADVANCE
 ITEM NUMBER: 131142090
 COUNTRY OF ORIGIN: TURKEY

Hoshizaki Advance K 140 C U is a 2/1 GN deep double door refrigerator with a net usable volume of 797 ltr. ranking C in energy efficiency class. It has a cabinet height of 1975mm and depth of 830mm without.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Compartmentalized design for maximum internal capacity and easy maintenance
- Clean free condenser (condenser filter not needed)
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf-supports moulded into the inner lining
- Complete wall rails, Shelf support
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pan-shaped inside base with rounded corners to catch fluids
- IP2X water protection
- Matching design identity as the Advance counters

WARRANTY PERIOD

5 Years on Parts & Labour

EXTERIOR

Stainless

INTERIOR

Stainless

Refrigerant: R290 / Refrigerant (kg): 0.085 / CO2 equivalent (kg): 0.255

CERTIFICATIONS



Energy Consumption (kWh/Year)	Energy Efficiency Class	Energy Efficiency Class Standard	Energy Efficiency Index EEI
926	C	ISO 22041-2019	48.32



HOSHIZAKI

Advance K 140-4 C U



TECHNICAL SPECIFICATIONS

Temperature Range	GN or Tray Size (mm)	Volume, Gross (ltr.)	Net Usable Volume (ltr.)	Power Supply	Connection Load (Watt)	Ref. capacity at -10°C (Watt)	Climate Class	Sound Level – dB(A)
0/+10°C	2/1 GN deep	1,200	797	230V, 50 Hz	270	634	S (max. ambient 40°C w/ 40% RH)	52


SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Weight, Packed (kg)
1344 x 830 x 1975 (including castors)	192

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

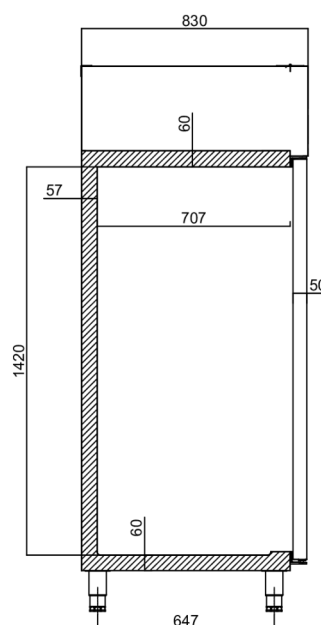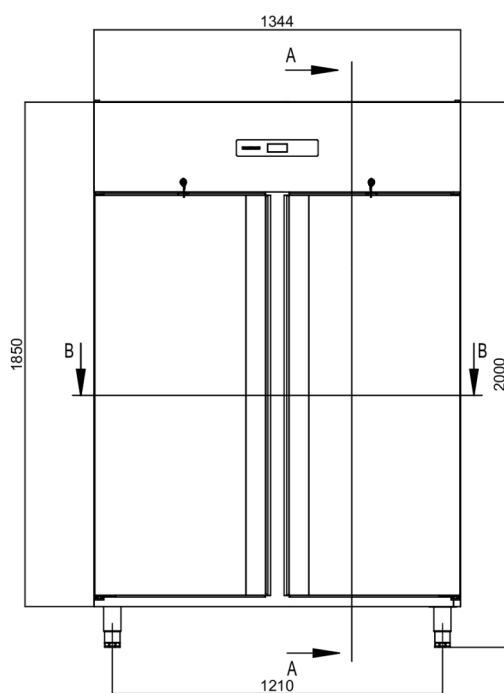

A-A

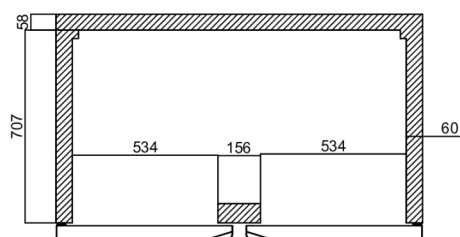

B-B

LEG	CASTER



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.uk