WAREWASHER AX-50 230/50/1 DD

Rack size 500x500mm and door clearance 380 mm

1303182



previous range. 3-stage filter system: surface, tank and extraction

Keeps the washing water in optimal conditions to maintain constant washing performance.

30% savings in water consumption during rinsing compared to the

√ The surface filters feature an "easy-on" design and can be quickly. removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

- √ The integration of the components provides greater resistance and
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39

Warewashing, made simple

- ✓ Active Xperience: simple and intuitive use
- Dedicated cycles: selection of the ideal washing programme using
- Electronic control panel with IP65 humidity protection.

You will never WASH ALONE

- Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

INCLUDES

- ✓ Peristaltic Detergent Pump
- 1 glasses basket.
- √ 1 mixed basket (plates).
- 1 small basket for cutlery.

Accessories

- Manual water softeners
- Automatic water softeners
- ☐ 500 x 500 mm. baskets
- ☐ Inserts & supplements
- ☐ High Feet Kit
- ☐ Reverse Osmosis device OS-140P
- Stands for dishswashers 500x500mm

SALES DESCRIPTION

Sani-Control: guaranteed disinfection

Embedded bodywork and easy-grip door: hygienic and ergonomic

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Double-walled body (partial).

Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous
- √ Embedded basket guides

Hydroblade™ washing arms

Redesigned nozzles for greater washing performance.

Tel.: +44 0116 246 1900

√ The "monoblock" design delivers durability and resistance to impacts.



sammic



www.sammic.co.uk Food Service Equipment Manufacturer Unit 2. Trevanth Road Troon Industrial Park LE4 9LS - Leicester uksales@sammic.com



| Project | Date |
|---------|------|
| Item | Qty |
| | |

1303182

WAREWASHER AX-50 230/50/1 DD

Rack size 500x500mm and door clearance 380 mm

Basket dimensions: 500 mm x 500 mm Maximum glass height: 380 mm

Cycle duration: -- " / -- " / -- " Production baskets/hour: 30 / 24 / 17

Wash temperature: 50 °C - 65 °C Rinse temperature: 75 °C - 85 °C

✓ Boiler capacity: 4.5 I

SPECIFICATIONS

- √ Wash tank capacity: 14 I
- √ Water consumption/cycle: 2.7 I

Loading

Pump: 500 W / 0.75 Hp

Tank: 1800 W Boiler: 2500 W Total loading: 3000 W

Electrical supply: $230 \text{ V} / 50 \text{ Hz} / 1 \sim (13 \text{ A})$


External dimensions (WxDxH)

- √ Width:580 mm
- ✓ Depth: 635 mm
- ✓ Height: 835 mm

Net weight: 55 Kg Noise level (1m.): <70 dB(A)

Crated dimensions

640 x 695 x 960 mm Gross weight: 62 Kg.

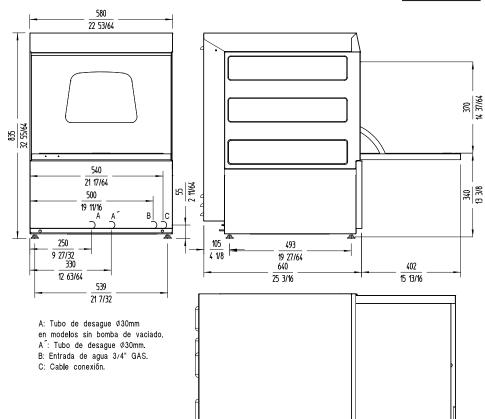



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



| Project | Date |
|---------|------|
| Item | Qty |

Approved