

DISHWASHER AX-51BC 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm

1303194



SALES DESCRIPTION

Sani-Control: guaranteed disinfection. Constant high temperatura rinse system for optimal disinfection. Embedded bodywork and easy-grip door: hygienic and ergonomic

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Double-walled body (partial).

Multi-power model. Default boiler loading: 2000W

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- √ The PRESSURE PUMP guarantees effective high-pressure rinsing
- √ WRAS certified.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- √ Compact tank volume (50% water saving compared to the previous) range).

Embedded basket guides

Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- √ The "monoblock" design delivers durability and resistance to impacts.
- 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- Keeps the washing water in optimal conditions to maintain constant washing performance.
- √ The surface filters feature an "easy-on" design and can be quickly. removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

- √ The integration of the components provides greater resistance and robustness.
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- √ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39

Warewashing, made simple

- √ Active Xperience: simple and intuitive use
- Dedicated cycles: selection of the ideal washing programme using
- Electronic control panel with IP65 humidity protection.

You will never WASH ALONE

- √ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- 60 years of experience and know-how at your disposal.

NCLUDES

- ✓ Peristaltic Detergent Pump
- ✓ Overflow drainage pump. Tank water renewal by the principle of density.
- ✓ Type-A air break (WRAS-appro-
- val in process 09/2021)
- 1 glasses basket.
- 1 mixed basket (plates).
- 1 small basket for cutlery.

Accessories

- Manual water softeners
- Automatic water softeners
- ☐ 500 x 500 mm. baskets
- ☐ Inserts & supplements
- ☐ High Feet Kit
- ☐ Stands for dishswashers 500x500mm







www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2 Treventh Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved



DISHWASHER AX-51BC 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm Maximum glass height: 380 mm

Cycle duration: -- " / -- " / -- " Production baskets/hour: 30 / 24 / 17

Wash temperature: -- °C - -- °C Rinse temperature: -- °C - -- °C

- √ Boiler capacity: 8 I
- √ Wash tank capacity: 14 I
- √ Water consumption/cycle: 2.7 I

Loading

Pump: 500 W / 0.7 Hp

Tank: 1800 W


Boiler: 2000 / 4000 / 5000 W Total loading: 2500 / 4500 / 5500 W

Electrical supply: -- V / -- Hz / -- ~ (-- A)

External dimensions (WxDxH)

- √ Width:580 mm
- ✓ Depth: 635 mm
- ✓ Height: 835 mm

Net weight: 60 Kg Noise level (1m.): -- dB(A)

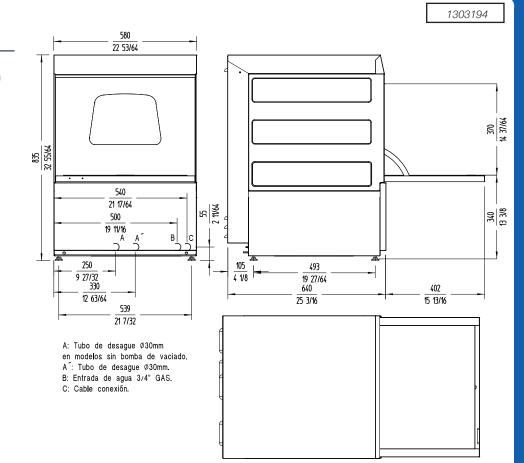



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



	Project	Date
	Item	Qty

Approved