



# DISHWASHER AX-51BCD 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm



1303198



WARE WASHING  
COMMERCIAL DISHWASHERS

## SALES DESCRIPTION

Sani-Control: guaranteed disinfection . Constant high temperatura rinse system for optimal disinfection. Embedded bodywork and easy-grip door: hygienic and ergonomic  
Exclusive Hydroblade™ washing arms: maximum effectiveness.  
3-stage filtering system.  
Double-walled body (partial).  
Multi-power model. Default boiler loading: 2000W

### Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing
- ✓ WRAS certified.

### New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).

- ✓ Embedded basket guides

### Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

### 3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.
- ✓ The surface filters feature an “easy-on” design and can be quickly removed without having to disconnect the washing arms.

### “Easy grip” door: new design with integrated door handle

- ✓ The integration of the components provides greater resistance and robustness.
- ✓ Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- ✓ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39

### Warewashing, made simple

- ✓ Active Xperience: simple and intuitive use
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Electronic control panel with IP65 humidity protection.

### You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

## INCLUDES

- ✓ Peristaltic Detergent Pump val in process 09/2021)
- ✓ Overflow drainage pump. Tank water renewal by the principle of density.
  - ✓ 1 glasses basket.
  - ✓ 1 mixed basket (plates).
  - ✓ 1 small basket for cutlery.
- ✓ Type-A air break (WRAS-appro-

## ACCESSORIES

- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts & supplements
- High Feet Kit
- Stands for dishwashers 500x500mm



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester

uksales@sammic.com  
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet  
updated 30/09/2021



# DISHWASHER AX-51BCD 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm



1303198

## SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm  
Maximum glass height: 380 mm

Cycle duration: -- " / -- " / -- "  
Production baskets/hour: 30 / 24 / 17

Wash temperature: -- °C - -- °C  
Rinse temperature: -- °C - -- °C


- ✓ Boiler capacity: 8 l
- ✓ Wash tank capacity: 14 l
- ✓ Water consumption/cycle: 2.7 l

### Loading

Pump: 500 W / 0.7 Hp  
Tank: 1800 W  
Boiler: 2000 / 4000 / 5000 W  
Total loading: 2500 / 4500 / 5500 W  
Electrical supply: -- V / -- Hz / -- ~ ( -- A)

### External dimensions (WxDxH)

- ✓ Width: 580 mm
  - ✓ Depth: 635 mm
  - ✓ Height: 835 mm
- Net weight: 60 Kg  
Noise level (1m.): -- dB(A)

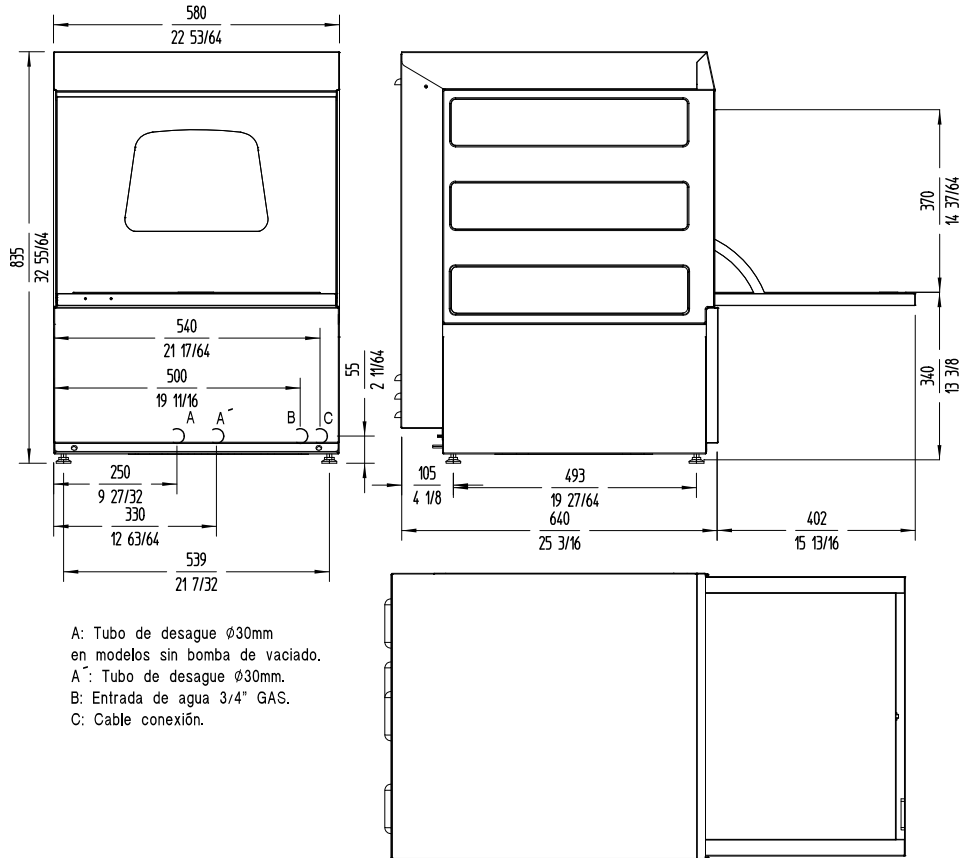

A: Tubo de desague  $\phi$ 30mm en modelos sin bomba de vaciado.  
A': Tubo de desague  $\phi$ 30mm.  
B: Entrada de agua 3/4" GAS.  
C: Cable conexi3n.

WARE WASHING  
COMMERCIAL DISHWASHERS



[www.sammic.co.uk](http://www.sammic.co.uk)

Food Service Equipment Manufacturer

Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester

[uksales@sammic.com](mailto:uksales@sammic.com)  
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet  
updated 30/09/2021